



EJC – 430 READY FOR USE FROM THE TRIDENT GROUP

TAMROCK EJC-430 WILLIAMS OPERATING SPECIFICATION UNDERGROUND HAUL TRUCK

POWERED WITH A DETROIT SERIES 60 ENGINE

MILITARY SPECIFICATION WIRING

WILLIAMS OPERATING SPECIFICATION 4 WIRE AND HIGH HEAT HOSE PACKAGE

WILLIAMS OPERATING SPECIFICATION CHASIS WEAR/STIFFENING PACKAGE

TRUCK IS FULLY SERVICED AND READY FOR OPERATION



EJC 430



TECHNICAL SPECIFICATION

A RUGGED PERFORMER FOR THE TOUGHEST HAULAGE APPLICATIONS
CAPACITY: 30 SHORT TONS (27.3 TONNES)





Main Dimensions

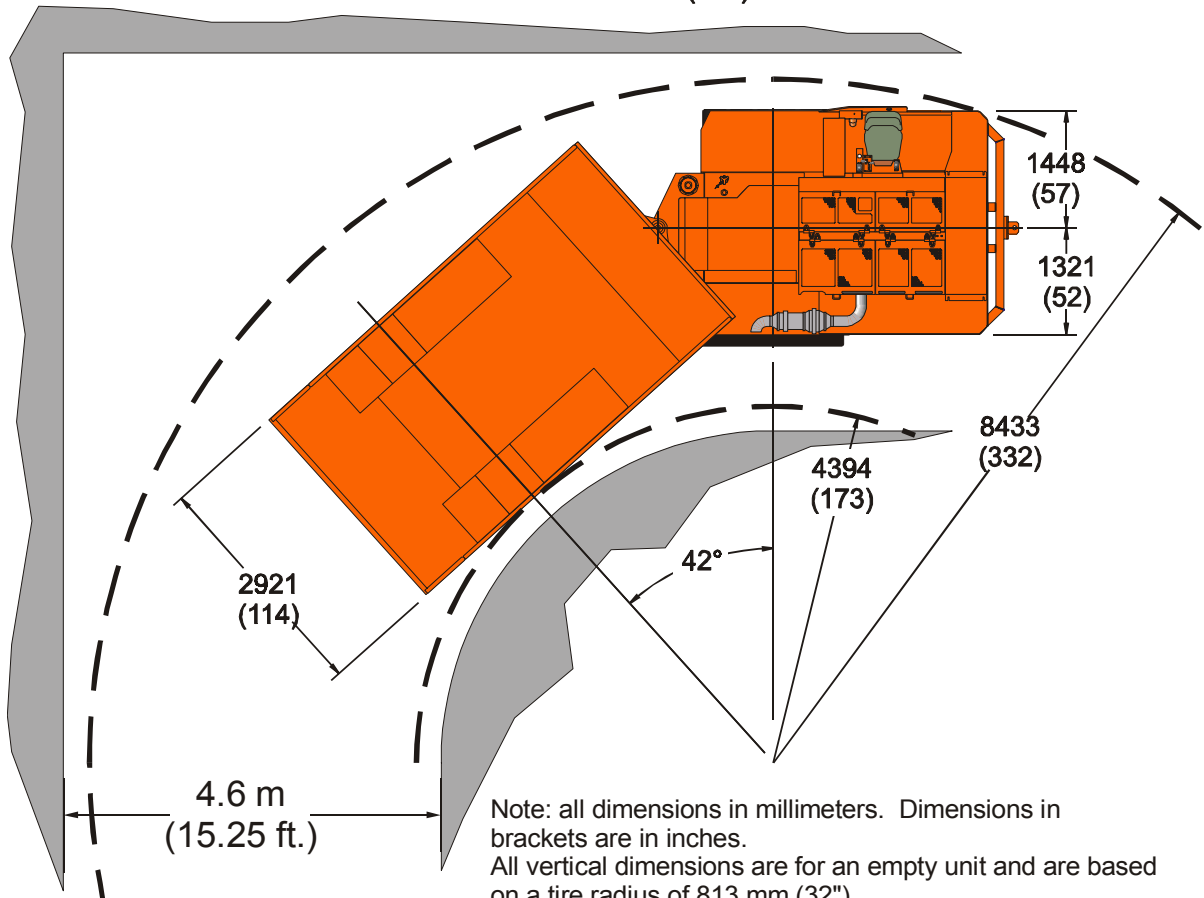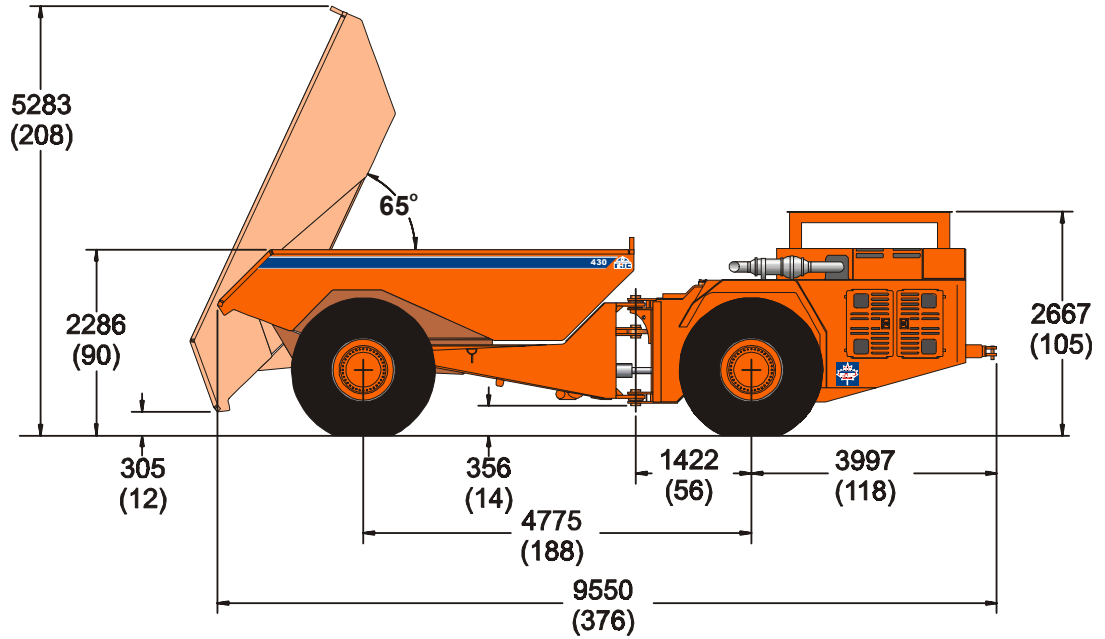



Standard Unit

Main dimensions

Total length	9 550 mm (376")
Total width	2 921 mm (114")
Height with safety canopy	2 667 mm (105")
Height of dump box	2 286 mm (90")
Dump Height	5 283 mm (208")

Weights

Operating weight	24 091 kg (53 000 lb.)
Total loaded weight	51 364 kg (113 000 lb.)
Shipping weight	23 682 kg (52 100 lb.)

Axle weights without load

front axle	15 750 kg (34 650 lb.)
rear axle	8 341 kg (18 350 lb.)

Axle weights with load

front axle	23 114 kg (50 850 lb.)
rear axle	28 250 kg (62 150 lb.)

Capacities

Payload	27 273 kg (60 000 lb.)
Dump box volume (SAE)	10.7 - 15.3 m ³ (14 - 20.7 yd ³)

Dump box motion times

Discharging time	17 sec.
Dumping angle	65 °

Driving speeds forward and reverse (Loaded)

1st gear	5.5 km/h (3.4 m.p.h.)
2nd gear	10.0 km/h (6.2 m.p.h.)
3rd gear	17.7 km/h (11.0 m.p.h.)
4th gear	32.2 km/h (20 m.p.h.)

Frame

Rear and front frame	Welded steel box construction
Material	G40.21 - 50wt Cat.#3
Central hinge	full plate, clevis type with spherical bearings

Standard Engine

Diesel engine	Detroit Diesel Series 60
Output	224 kW (300 HP) @2100 RPM
Torque	1424 Nm (1050 ft.lb.) @1350 RPM
Number of cylinders	In line 6
Displacement	11.1 litres (667 in3)
Cooling system	Liquid Cooled
Combustion principle	Direct injected, turbo charged, after cooled
Air filtration	Donaldson, dry type
Electric system	24 V
Exhaust system	Catalytic purifier with silencer

Torque Converter

Clark C8612	Single stage,
3.05 torque multiplication ratio,	
0.895:1 offset ratio	

Transmission

Clark 5421	4-speed forward and reverse
------------	-----------------------------

Standard axles

Front axle	Clark 19D4354, standard differential, oscillating 16° total.
Rear axle	Clark 19D4354, standard differential, fixed.

Standard tires

Tire size	21:00 R25
Type	Michelin XKA**
Air pressure, front	552 kPa (5.52 bar) (80 psi)
Air pressure, rear	552 kPa (5.52 bar) (80 psi)

Steering hydraulics

Full hydraulic power steering, centre articulated with double acting steering cylinder. Open centre system with a gear pump and pilot operated stick steer.

Turning radius:

Right	inner	4394 mm (173 ")
	outer	8433 mm (332 ")
Turning angle		42.0 °

Main components in steering system:

Hydraulic pump	Gear pump
Control valve	Pilot operated
Steering cylinder	127 mm bore X 64 mm rod (5.0" X 2.5")

Pressure settings:

Main relief	17.2 MPa (172 bar) (2500 psi)
Port relief valves	18.6 MPa (186 bar) (2700 psi)

Dump box hydraulics

Full hydraulic open-centre system with two gear pumps. Oil flows to the dump box hydraulic system from the dump box pump and the steering pump when the steering system is not in use. Pilot operated lever dump box control.

Main components:

Dump cylinders (2)	Commercial 2-stage telescopic 184/152 mm bores (7.25/6.0")
Hydraulic pump	Gear pump
Control valve	Pilot operated

Pressure Settings:

Main relief	17.2 MPa (172 bar) (2500 psi)
Port relief (dump)	17.9 MPa (179 bar) (2600 psi)
Hydraulic oil tank capacity	Approx. 283 litre (75 gal)

Standard brakes

Service brakes are spring applied, hydraulically released, liquid cooled (LCB) multi-disc brakes on all wheels. Service brakes also function as an emergency brake, when the emergency brake hand valve is on.

Main components in the brake system:

Pressure accumulators	Piston type with charging valve
Brake pedal valve	Modulated

Electrical equipment

Alternator	24V 70A, min
Batteries	2 x 12 V, 950 CCA
Starter	24 V, Heavy Duty
Driving and working lights	4pcs front, 2pcs rear

Standard manuals (customer)

3 pcs Spare parts manuals	English
3 Operators manual	English
3 Service manual	English

Standard manuals (region)

1 pcs Spare parts manuals	English
1 Operators manual	English
1 Service manual	English



Speeds On Grade

